


Light Duty Platform Step Ladder

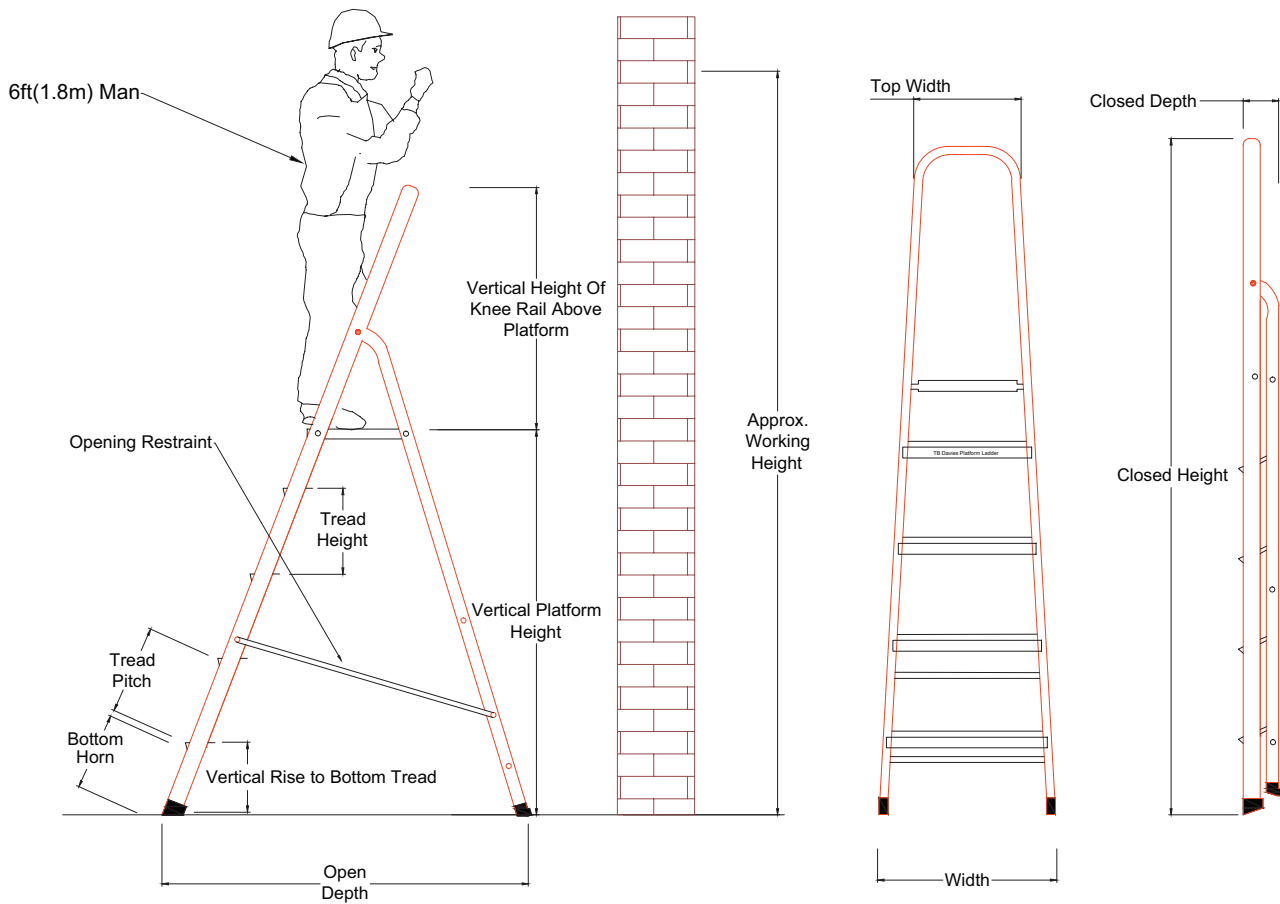

Common Dimensions

Top Width	290
Tread Depth	82
Storage Depth	100
Platform Tread (W x D)	264 x 258
Height From Top Tread To Handrail	600

Product Dimensions

PRODUCT SKU	TREAD COUNT	APPROX. WORKING HEIGHT	PLATFORM HEIGHT	OPEN HEIGHT	CLOSED HEIGHT	WIDTH	OPEN DEPTH	WEIGHT (NETT KG)
1212-003	3	2,220	620	1,220	1,330	440	690	3.50
1212-004	4	2,440	840	1,440	1,570	460	840	4.00
1212-005	5	2,660	1,060	1,660	1,810	490	1,000	5.00
1212-006	6	2,880	1,280	1,880	2,040	510	1,190	5.50
1212-007	7	3,110	1,510	2,100	2,280	530	1,300	6.00
1212-008	8	3,288	1,688	2,290	2,540	560	1,500	7.00

Technical Description

Ideal for light trade use, with a slim design and continuous handrail positioned extra high for ease and comfort in use.

- » Lightweight yet robust construction
- » High continuous handrail for ease of use
- » Deep comfortable treads
- » Strong sturdy platform

Standards & Classification

- » Maximum Static Vertical Load 150kg
- » Conforms to EN 131

Warranty

- » 1 Year

Shipping Dimensions

PRODUCT SKU	SHIPPING LENGTH	SHIPPING WIDTH	SHIPPING DEPTH	SHIPPING VOLUME (M ³)	SHIPPING WEIGHT (GROSS KG)	BARCODE
1212-003	1,330	440	100	0.0585	3.50	5060356910762
1212-004	1,570	460	100	0.0722	4.00	5060356910779
1212-005	1,810	490	100	0.0887	5.00	5060356910786
1212-006	2,040	510	100	0.1040	5.50	5060356910793
1212-007	2,280	530	100	0.1208	6.00	5060356910809
1212-008	2,540	560	100	0.1422	7.00	5060356910816

Notes

All dimensions stated in mm unless marked otherwise. Engineering tolerance +/- 10% or 10mm, whichever is greater. Where applicable, approximate working height is calculated as 1,600mm + Last Climbing Height (4th rung from the ladder top) or the Platform Height.